Enclosed Switch

Compact Limit Switch That's Also Thin and Highly Sealed

- Approved by EN, UL, CSA, and CCC (Chinese standard). (Ask your OMRON representative for information on approved models.)
- Sealing characteristics that meet IEC IP67 degree of protection.
- Triple-sealed construction:
- Plunger section sealed via nitrile rubber packing seal and diaphragm; switch section sealed via nitrile rubber cap; cable entrance sealed via encapsulating material.
- Cable lengths of 3 and 5 m available on standard models. Models also available with UL and CSA-certified cables.
- Multiple mounting possible with Switches with Plungers.
- Models with red LED indicators added to series for easy confirmation of operation.
 - (Set by default to light for non-operation.)
- VCTF oil-resistant cables with CE marking. (Applicable only to standard models.)



Model Number Legend (Not all combinations are possible. Ask your OMRON representative for details.) **Standard Models**

D4C-	
(1)(2)(3)	

(1) Rated Current

1: 5 A at 250 VAC, 4 A at 30 VDC 2: 5 A at 125 VAC (with LED indicator) 3: 4 A 30 VDC (with LED indicator) 4: 0.1 A at 125 VAC, 0.1 A at 30 VDC 5: 0.1 A at 125 VAC (with LED indicator) 6: 0.1 A at 30 VDC (with LED indicator)


(2) Cable Specifications

- 2: VCTF oil-resistant cable (3 m)
- 3: VCTF oil-resistant cable (5 m)
- 4: VCTF (3 m)
- 5: VCTF (5 m)
- 6: SJT(O) (3 m)
- 7: SJT(O) (5 m)

(3) Actuator

- 01: Pin plunger
- 02: Roller plunger
- 03: Crossroller plunger
- 20: Roller lever
- 24: Roller lever (high-sensitivity model)
- 31: Sealed pin plunger
- 32: Sealed roller plunger
- 33: Sealed crossroller
- 50: Plastic rod
- 60: Center roller lever

Pre-wired Models



(1) Rated Current

- 1: 1 A at 125 VAC, 1 A at 30 VDC
- (Without operation indicator)
- 2: 1 A at 125 VAC (with operation indicator)
- 3: 1 A at 30 VDC (with operation indicator)

(2) Actuator

- 01: Pin plunger
- 02: Roller plunger
- 31: Sealed plunger
- 32: Sealed roller plunger
- 24: Roller lever (high-sensitivity model)

(3) Wiring Specifications

- DK1EJ: Pre-wired models (3 conductors: DC specification) AK1EJ: Pre-wired models
- (3 conductors: AC specification) M1J: Connector models for ASI devices
 - (2 conductors: NO wiring)

(4) Cable length

03: 0.3 m

Wiring Specifications

Internal switch	Connector
COM	3
NC	2
NO	4



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Be sure to read Safety Precautions on page 13 to 14 and Safety Precautions for All Limit Switches.

Weather-resistant Models

D4C-	-P
(1)(2)(3)	(4)

(1) Rated Current

1: 5 A at 250 VAC, 4 A at 30 VDC 2: 5 A at 125 VAC (with LED indicator) 3: 4 A at 30 VDC (with LED indicator) 4: 0.1 A at 125 VAC, 0.1 A at 30 VDC

(2) Cable Specifications

2: VCTF oil-resistant cable (3 m)

3: VCTF oil-resistant cable (5 m)

(3) Actuator

- 20: Roller lever
- 24: Roller lever (high-sensitivity model)
- 27: Adjustable roller lever
- 29: Adjustable rod lever

(4) Structure

P: Weather-resistant

Ordering Information

Switches

Standard Switches with No Operation Indicator

	Det			Standard load		Micr	oload
	Rati	ngs able	5	5 A at 250 VAC, 4 A at 30 VDC		0.1 A at 125 VAC	C, 0.1 A at 30 VDC
	Cable length		VCTF oil-resistant cable *1	VCTF cable *2	SJT(O) cable *3	VCTF oil-resistant cable *1	VCTF cable *2
Actuator		(m)			Model	•	
Pin plunger	A	3	D4C-1201	D4C-1401	D4C-1601	D4C-4201	D4C-4401
i in plunger		5	D4C-1301	D4C-1501	D4C-1701	D4C-4301	D4C-4501
Roller plunger	R	3	D4C-1202	D4C-1402	D4C-1602	D4C-4202	D4C-4402
	Δ	5	D4C-1302	D4C-1502	D4C-1702	D4C-4302	D4C-4502
Crossroller	冎	3	D4C-1203	D4C-1403	D4C-1603	D4C-4203	D4C-4403
plunger	\square	5	D4C-1303	D4C-1503	D4C-1703	D4C-4303	D4C-4503
Boller lever	Roller lever	3	D4C-1220	D4C-1420	D4C-1620	D4C-4220	D4C-4420
		5	D4C-1320	D4C-1520	D4C-1720	D4C-4320	D4C-4520
Roller lever, (3	D4C-1224	D4C-1424	D4C-1624	D4C-4224	D4C-4424
sensitivity		5	D4C-1324	D4C-1524	D4C-1724	D4C-4324	D4C-4524
Sealed pin	Δ	3	D4C-1231	D4C-1431	D4C-1631	D4C-4231	D4C-4431
plunger		5	D4C-1331	D4C-1531	D4C-1731	D4C-4331	D4C-4531
Sealed roller	8	3	D4C-1232	D4C-1432	D4C-1632	D4C-4232	D4C-4432
plunger	Δ	5	D4C-1332	D4C-1532	D4C-1732	D4C-4332	D4C-4532
Sealed crossroller	冎	3	D4C-1233	D4C-1433	D4C-1633	D4C-4233	D4C-4433
plunger	\square	5	D4C-1333	D4C-1533	D4C-1733	D4C-4333	D4C-4533
Plastic rod	Î	3	D4C-1250	D4C-1450	D4C-1650	D4C-4250	D4C-4450
		5	D4C-1350	D4C-1550	D4C-1750	D4C-4350	D4C-4550
Center roller	Ĩ	3	D4C-1260	D4C-1460	D4C-1660	D4C-4260	D4C-4460
lever	Ë	5	D4C-1360	D4C-1560		D4C-4360	D4C-4560

Note: 1. Models are available separately with resistance to viscous oils (oil drain holes are provided), but only with Plunger Models. Add "-M" to the model number (example: D4C-1202 would be D4C-1202-M). Ask your nearest OMRON representative for details.
2. Switches with variable roller levers are also available. Ask your nearest OMRON representative for details.
*1. Oil-resistant vinyl cabtire cables; approved by EN and IEC.
*2. Ordinary vinyl cabtire cables.
*3. Switches with SJT(O) Cables (cables approved by UL and CSA) are approved by UL and CSA.

F	Ratings	5 A at	125 VAC	4 A a	4 A at 30 VDC		
	Cable	VCTF oil-resistant cable *1	VCTF cable *2	VCTF oil-resistant cable *1	VCTF cable *2		
Actuator le	ngth (m)			Model			
Pin plunger	3	D4C-2201	D4C-2401	D4C-3201	D4C-3401		
	5	D4C-2301	D4C-2501	D4C-3301	D4C-3501		
Roller plunger) 3	D4C-2202	D4C-2402	D4C-3202	D4C-3402		
	5	D4C-2302	D4C-2502	D4C-3302	D4C-3502		
Crossroller plunger	3	D4C-2203	D4C-2403	D4C-3203	D4C-3403		
	5	D4C-2303	D4C-2503	D4C-3303	D4C-3503		
Roller lever	Q 3	D4C-2220	D4C-2420	D4C-3220	D4C-3420		
	5	D4C-2320	D4C-2520	D4C-3320	D4C-3520		
Roller lever,	Q 3	D4C-2224	D4C-2424	D4C-3224	D4C-3424		
high- sensitivity	5	D4C-2324	D4C-2524	D4C-3324	D4C-3524		
ے Sealed pin	3	D4C-2231	D4C-2431	D4C-3231	D4C-3431		
plunger	1 5	D4C-2331	D4C-2531	D4C-3331	D4C-3531		
Sealed roller) 3	D4C-2232	D4C-2432	D4C-3232	D4C-3432		
Sealed roller	5	D4C-2332	D4C-2532	D4C-3332	D4C-3532		
Sealed	3	D4C-2233	D4C-2433	D4C-3233	D4C-3433		
crossroller	5	D4C-2333	D4C-2533	D4C-3333	D4C-3533		
Plastic rod	3	D4C-2250	D4C-2450	D4C-3250	D4C-3450		
	_ 5	D4C-2350	D4C-2550	D4C-3350	D4C-3550		
Center roller	P3	D4C-2260	D4C-2460	D4C-3260	D4C-3460		
ever [5 1	D4C-2360	D4C-2560	D4C-3360	D4C-3560		

Standard Switches with Operation Indicator (Red)

Note: Ask your nearest OMRON representative for information on Switching with approved international standards. *1. Oil-resistant vinyl cabtire cables; approved by EN and IEC. *2. Ordinary vinyl cabtire cables.

Standard Switches with Operation Indicator

			0.1 A at 125 VAC	0.1 A at 30 VDC
	Rati Ca	ngs able	VCTF oil-resistant cable*	VCTF oil-resistant cable*
Actuator	Cable length	n (m)	Μ	lodel
Dia alumana	А	3	D4C-5201	D4C-6201
Pin plunger	\square	5		D4C-6301
Roller plunger	R	3	D4C-5202	D4C-6202
noller pluriger	Δ	5	D4C-5302	D4C-6302
Crossroller plunger	山	3	D4C-5203	D4C-6203
		5	D4C-5303	D4C-6303
Roller lever		3	D4C-5220	D4C-6220
		5	D4C-5320	D4C-6320
Roller lever, high-		3	D4C-5224	D4C-6224
sensitivity		5	D4C-5324	D4C-6324
Sealed pin plunger	А	3		D4C-6231
Sealed pill piuliger	\square	5		D4C-6331
	R	3	D4C-5232	D4C-6232
Sealed roller plunger	Δ	5	D4C-5332	D4C-6332
Sealed	ф	3		D4C-6233
crossroller plunger		5		D4C-6333
Plastic rod	Î	3	D4C-5250	D4C-6250
Flastic TOU		5	D4C-5350	D4C-6350

Note: Ask your nearest OMRON representative for information on Switching with approved international standards. * Oil-resistant vinyl cabtire cables; approved by EN and IEC.

Pre-wired Models (Use VCTF Oil-resistant Cable)

	Ratings	1 A at 1	25 VAC	1 A at 30 VDC		
Actuator	Operation indicator	Without operation indicator	With operation indicator	Without operation indicator	With operation indicator	
Pin plunger	Δ				D4C-3001-DK1EJ□	
Roller plunger	R	D4C-1002-AK1EJ□	D4C-2002-AK1EJ	D4C-1002-DK1EJ	D4C-3002-DK1EJ	
Sealed plunger	Δ				D4C-3031-DK1EJ	
Sealed roller plunger	8			D4C-1032-DK1EJ	D4C-3032-DK1EJ	
Roller lever (high- sensitivity model)			D4C-2024-AK1EJ	D4C-1024-DK1EJ	D4C-3024-DK1EJ	

Note: 1. The □ contains the length of the cable. For example: 30 cm → D4C-2002-AK1EJ03
 2. M1J models are also available. Contact your OMRON sales representative for further information.

3. Of the above model numbers, some with special specifications are not registered.

Weather-resistant Models

Operation indicator			Without opera	ting indication	With operating indication		
			Standard load	Microload	Standa	rd load	
Ratings			5 A at 250 VAC 4 A at 30 VDC	0.1 A at 125 VAC 0.1 A at 30 VDC	5 A at 125 VAC	4 A at 30 VDC	
				VCTF oil-resistant cable*			
Actuator	Cable length	n (m)		Мо	del		
		3	D4C-1220-P	D4C-4220-P	D4C-2220-P	D4C-3220-P	
Roller lever		5	D4C-1320-P				
Roller lever (high-		3	D4C-1224-P	D4C-4224-P	D4C-2224-P	D4C-3224-P	
sensitivity model)		5	D4C-1324-P	D4C-4324-P	D4C-2324-P	D4C-3324-P	
Adjustable reller lever	CR.	3	D4C-1227-P	D4C-4227-P	D4C-2227-P	D4C-3227-P	
Adjustable roller lever	(H)	5	D4C-1327-P	D4C-4327-P	D4C-2327-P	D4C-3327-P	
Adjustable red lover	CX.	3	D4C-1229-P	D4C-4229-P		D4C-3229-P	
Adjustable rod lever	(H)	5	D4C-1329-P		D4C-2329-P	D4C-3329-P	

* Vinyl cabtire cable with excellent oil resistance.

Note: Silicon rubber is used to increase resistance to the environment. Silicon rubber, however, can generate silicon gas. (This can occur at room temperature, but the amount of silicon gas generated increases at higher temperatures.) Silicon gas will react as a result of arc energy and form silicon oxide (SiO₂). If silicon oxide accumulates on the contacts, contact interference can occur and can interfere with the device. Before using a Switch, test it under actual application conditions (including the environment and operating frequency) to confirm that no problems will occur in actual.

Applicable Cables

		Туре	For AC	For DC
Appearance	No. of conductors	Cable length	Model	Model
Straight	4	2 m	XS2F-A421-D90-F	XS2F-D421-D80-F
	4	5 m	XS2F-A421-G90-F	XS2F-D421-G80-F

Mounting Plates (Order Separately)

The WL/WL-N model incorporated by equipment can be replaced with the D4C together with the Mounting Plate without changing the position of the dog or cam.


List of Replaceable Models

WL/WL-N model (Actuator)	D4C model (Actuator)	Plate
WLD/WL01D/WLD18-N (Top plunger)	→ D4C-□□01 (Plunger)	D4C-P001
WLD2/WL01D2/WLD28-N (Top roller plunger)	→ D4C-□□02 (Roller plunger)	D4C-P002
WLCA2/WL01CA2/WLCA2-N (Roller lever)	→ D4C-□□20 (Roller lever)	D4C-P020

Note: The WL01 is for micro loads.

Example of Replacement

Note: The position of the dog remains unchanged.



Individual Parts Head/Actuator

Actuator	Head (with actuator)	Actuator
Pin plunger	D4C-0001	
Roller plunger	D4C-0002	
Crossroller plunger	D4C-0003	
Roller lever	D4C-0020	WL-1A100
Roller lever (weather-resistant model)		WL-1A100P1
Roller lever (high-sensitivity model)	D4C-0024	WL-1A100
Variable roller lever	D4C-0027	
Variable rod lever	D4C-0029	HL-1HPA500
Sealed pin plunger	D4C-0031	
Sealed roller plunger	D4C-0032	
Sealed crossroller plunger	D4C-0033	
Plastic rod	D4C-0050	
Center roller lever	D4C-0060	

Note: 1. The model numbers for heads are of the form D4C-00 , with the numbers in the squares indicating the type of actuator.

2. Actuators for plunger models, plastic rod models, and center roller lever models cannot be ordered individually. They must be ordered together with the head.

Specifications

Approved Standards

Agency	Standard	File No.	
TÜV Product Service	EN60947-5-1	*1, 3	
UL	UL508	E76675 *2	
CSA	CSA C22.2 No.14	LR45746 *2	
CCC(CQC)	GB14048.5	2003010305077626 *3	

*1. Excluding weather-resistant models, only models with VCTF oil-resistant cables and pre-wired models are certified.

(Contact your OMRON representative for the model numbers.) Models with VCTF oil-resistant cables and pre-wired models (125 VAC) are certified for CE Marking.

*2. SJT(O)-cable models only.

(Applicable only to models listed on pages 2 to 3.)

*3. Ask your OMRON representative for information on approved models.

Ratings **Standard Model**

	Non-inductive load (A)				Inductive load (A)				
Rated voltage	Resistive load		Resistive load Lamp load		Inductive load		Motor load		
	NC	NO	NC	NO	NC	NO	NC	NO	
125 VAC	5 (0.1)		1.5	0.7	3		2.5	1.3	
250 VAC	5		1	0.5	2		1.5	0.8	
8 VDC	5 (0.1)		2		5	4	3		
14 VDC	5 (5 (0.1)		2		4	3		
30 VDC	4 (0.1)		2		3	3	3		
125 VDC	0.4		0.05		0.4		0.	05	
250 VDC	0.2	2	0.	03	0.2		0.03		

Inrush	NC	20 A max.
current	NO	10 A max.

Note: 1. The values given on the top are steady-state currents.

- 2. Inductive loads have a power factor of 0.4 min. (AC) and a time constant of 7 ms max. (DC). 3. Lamp loads have an inrush current of 10 times
- the steady-state current.
- 4. Motor loads have an inrush current of 6 times the steady-state current.
- 5. The values "0.1" given in parentheses are for micro load models.

Pre-wired Model

	Non-inductive load (A)					Inductive load (A)				
Rated voltage	Resistive load		Resistive load Lamp load		Inductive load		Motor load			
	NC	NO	NC	NO	NC	NO	NC	NO		
125 VAC	1	1	1	0.7	1	1	1	1		
30 VDC	1	1	1	1	1	1	1	1		

Approved Standard Ratings TÜV (EN60947-5-1), CCC (GB14048.5)

Model	Applicable category and ratings	I the
D4C-1	AC-15 2 A/250 V DC-12 2 A/30 V	5 A 4 A
D4C-2	AC-15 2 A/125 V	5 A
D4C-3	DC-12 2 A/30 V	4 A
D4C-4	AC-14 0.1 A/125 V DC-12 0.1 A/30 V	0.5 A 0.5 A
D4C-5	AC-14 0.1 A/125 V	0.5 A
D4C-6	DC-12 0.1 A/30 V	0.5 A

UL/CSA

B300

Rated voltage	Carry current	Curre	nt (A)	Volt-amperes (VA)	
Haleu vollaye	Carry current	Make	Break	Make	Break
120 VAC	5 A	30	3	3,600	360
240 VAC	ЪА	15	1.5	3,600	360

B150

Rated voltage	Carry current	Curre	nt (A)	Volt-amperes (VA)	
	Carry current	Make	Break	Make	Break
120 VAC	5 A	30	3	3,600	360

Characteristics

Degree of	protection	IP67			
Durability	Mechanical *3	10,000,000 operations min.			
*1	Electrical *2	200,000 operations min. (5 A at 125 VAC, resistive load)			
Operating	speed	0.1 mm/s to 0.5 m/s (in case of plunger)			
Operating	speed	1 mm/s to 1 m/s (in case of roller lever)			
Operating	Mechanical	120 operations/min			
frequency	Electrical	30 operations/min			
Rated free	quency	50/60 Hz			
Insulation	resistance	100 MΩ min. (at 500 VDC)			
Contact re	esistance (initial)	250 mΩ max. (initial value with 2-m VCTF cable) 300 mΩ max. (initial value with 3-m VCTF cable) 400 mΩ max. (initial value with 5-m VCTF cable)			
	Between terminals of the same polarity	1,000 VAC, 50/60 Hz for 1 min			
Dielectric strength	Between current- carrying metal part and ground	1,500 VAC, 50/60 Hz for 1 min Uimp: 2.5 kV (EN60947-5-1)			
	Between each terminal and non-current-carry- ing metal part,	1,500 VAC, 50/60 Hz for 1 min Uimp: 2.5 kV(EN60947-5-1)			
Rated insu	lation voltage (Ui)	300 V (EN60947-5-1) *5			
Pollution degre	e (operating environment)	3 (EN60947-5-1)			
Short-circuit p	rotective device (SCPD)	10 A fuse type gI or gG (IEC60269)			
Conditional s	short-circuit current	100 A (EN60947-5-1)			
	nal enclosed urrent (I the)	5 A, 4 A, 0.5 A (EN60947-5-1)			
Protection a	gainst electric shock	Class I (with grounding wire) *6			
Vibration re- sistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude *4			
Shock re-	Destruction	1,000 m/s ² max.			
sistance	Malfunction	500 m/s ² max. *4			
Ambient ope	rating temperature	-10°C to +70°C (with no icing)			
Ambient ope	rating humidity	35% to 95%RH			
Weight (D	4C-1202)	With 3-m VCTF cable: 360 g With 5-m VCTF cable: 540 g			


Note: The above figures are initial values.

- *1. The values are calculated at an operating temperature of +5°C to +35°C, and an operating humidity of 40% to 70%RH. Contact your OMRON sales representative for more detailed information on other operating environments.
- *2. Pre-wired Models: 1,000,000 operations min. (DC specifications, switching current: 0.1 A) *3. Outdoor specifications: 500,000 operations min. *4. Excluding Plastic Rods.

- *5. Pre-wired models: 250 V
- *6. Pre-wired models: class III

B300 (D4C-16 , -17) B150 (D4C-26 , -27)

Engineering Data Electrical Durability

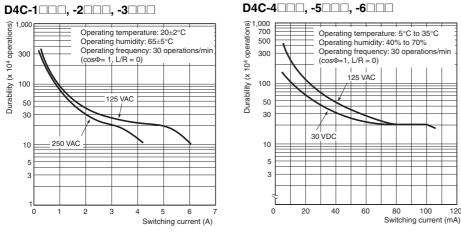

Leakage Current for LED-indicator Models


The leakage currents and resistances of LED-indicator models are given in the following table.

Model	Voltage	Leakage current	Resistance
D4C-2	125 VAC	1.7 mA	68 kΩ
D4C-3	30 VDC	1.7 mA	15 kΩ
D4C-5	125 VAC	1.7 mA	68 kΩ
D4C-6	30 VDC	1.7 mA	15 kΩ

Structure and Nomenclature

Structure Standard Models

Roller Lever Models Without Indicator

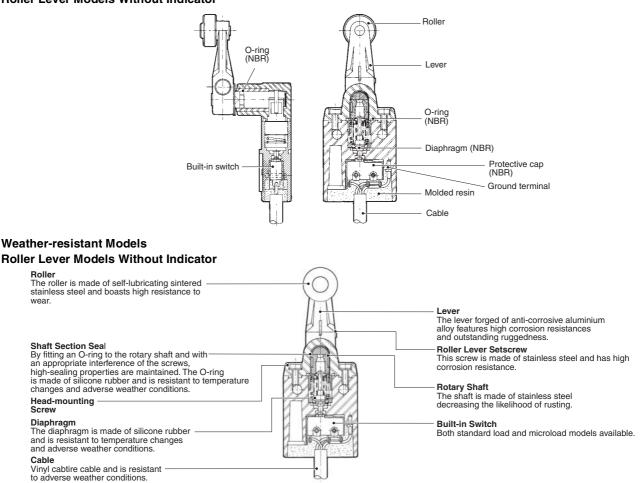


120


Contact Form Standard Models/Weather-resistant Models Without Operation Indicator

(black)COM - NC (red) — NO *1

With Operation Indicator (Lit when Not Actuated) <24 VDC LED>




<100 VAC LED>




Connector Models for ASI Devices (-M1J) Without Operation Indicator



With Operation Indicator (Lit when Not Actuated)




Pre-wired Models (-AK1EJD, -DK1EJD) Without Operation Indicator







With Operation Indicator (Lit when Not Actuated) <24 VDC LED>



<100 VAC LED>





- *1. NO (white): VCTF oil-resistant cable or VCTF cable.


- NO (while): SJT (O) cable approved by UL and CSA.
 *2. E (yellow/green): VCTF cil-resistant cable.
 E (green): VCTF cable or SJT (O) cable approved by UL and CSA.
 *3. E (ground) is not grounded.
- *4. The position of the positioning piece is not fixed. Using an L-shaped
- connector may result in failure. Use only a straight connector. Note: 1. "Lit when not Actuated" means that when the actuator is in the free
 - position, the indicator is lit, and when the actuator is turned or pushed and the contact comes into contact with the NO side, the indicator turns OFF. 2. Leakage current from indicator circuit may cause load's malfunction.
 - Please check the load's OFF current before use the indicator-equipped switch.

D4C


Dimensions and Operating Characteristics

Switches Standard Models

Models without LED indicators are shown in the illustrations and dimensions diagrams. Refer to page 11 for *Models with LED Indicators*. The boxes in the model numbers are replaced with the rating and cable type. Refer to page 1 for the *Model Number Structure*.

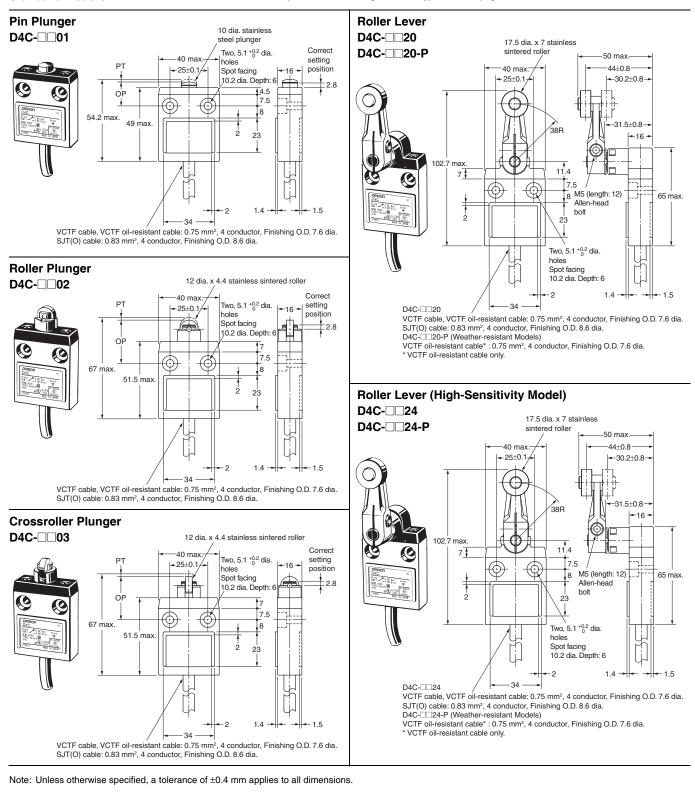

Model D4C-020 D4C-024 Operating D4C-001 D4C-002 D4C-003 D4C-020-F D4C-024-P characteristics Operating force OF max. 11.77 N 11.77 N 11.77 N 5.69 N 5.69 N min. Release force RF 4.41 N 4.41 N 4.41 N 1.47 N 1.47 N Pretravel PT max. 1.8 mm 1.8 mm 1.8 mm 25° 10°±3° Overtravel от min. 3 mm 3 mm 3 mm 40° 50° Movement Differential MD 0.2 mm 0.2 mm 3° 3° max. 0.2 mm Operating Position OP 15.7±1 mm 28.5±1 mm 28.5±1 mm ------

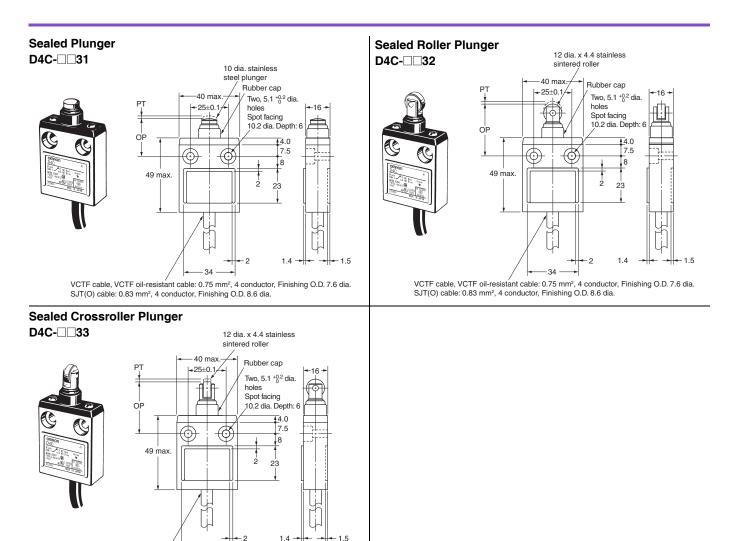


VCTF cable, VCTF oil-resistant cable: 0.75 mm², 4 conductor, Finishing O.D. 7.6 dia. SJT(O) cable: 0.83 mm², 4 conductor, Finishing O.D. 8.6 dia.

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Operating characteristics	Ν	Nodel	D4C-□□31	D4C-032	D4C-033
Operating force		max.	17.65 N	17.65 N	17.65 N
Release force	RF	min.	4.41 N	4.41 N	4.41 N
Pretravel	PT	max.	1.8 mm	1.8 mm	1.8 mm
Overtravel	OT	min.	3 mm	3 mm	3 mm
Movement Differential	MD	max.	0.2 mm	0.2 mm	0.2 mm
Operating Position	OP		24.9±1 mm	34.3±1 mm	34.3±1 mm
Total travel	TT *		(5) mm	(5) mm	(5) mm

* The TT is a reference value.

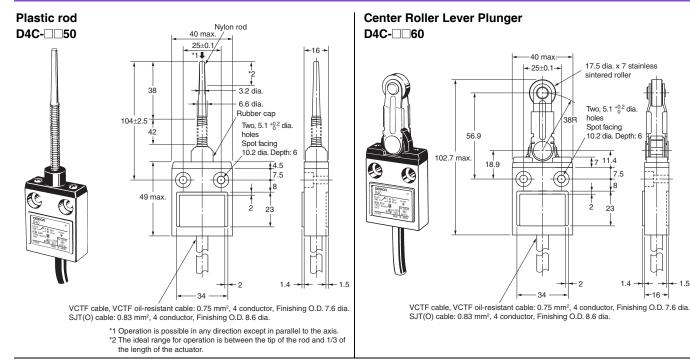


Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Operating characteristics		Model	D4C-□□50	D4C-□□60
Operating force	OF	max.	1.47 N	6.67 N
Release force	RF	min.		1.47 N
Pretravel	PΤ	max.	15°	10°±3°
Overtravel	OT	min.		50°
Movement Differential	MD	max.		3 °
Operating Position	OP			
Total travel	TT			

Models with LED Indicator

The dimensions of the LED indicator for models equipped with one are shown below.




Pre-wired Models

Pin Plunger **Roller Plunger** D4C-001-K1EJ D4C-002-K1EJ 12 dia. x 4.4 stainless sintered roller D4C-001-M1J 10 dia. stainless D4C-002-M1J steel plunger 40 max Two, 5.1 ^{+0.2} dia. Correct setting рт Two, 5.1 +0.2 dia. 40 max +25±0.1/ Correct setting holes position РТ holes -25±0.1/ Spot facing position Spot facing 10.2 dia. Depth: 6 10 2.8 10.2 dia. Depth: 6 ± 2.8 4.5 OP OP 7.5 ŧ ٩ Ø 7.5 Ī8 Æ (0 54.2 max. 67 max. 8 49 max 51.5 max 2 23 23 - 2 -2 1.5 1.5 1.4 34 34 1.4 6 dia. 6 dia. XS2H-D421 ímhun) ίμιψη XS2H-D421 ۲ ЩЩ Li.

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Operating characteristics		Model	D4C-□001 -□K1EJ□	D4C-□002 -□K1EJ□
Operating force	OF	max.	11.77 N	11.77 N
Release force	RF	min.	4.41 N	4.41 N
Pretravel	PT	max.	1.8 mm	1.8 mm
Overtravel	OT	min.	3 mm	3 mm
Movement Differential	MD	max.	0.2 mm	0.2 mm
Operating Position	OP		15.7±1 mm	28.5±1 mm

Note: Specifications are the same for -M1J Switches.

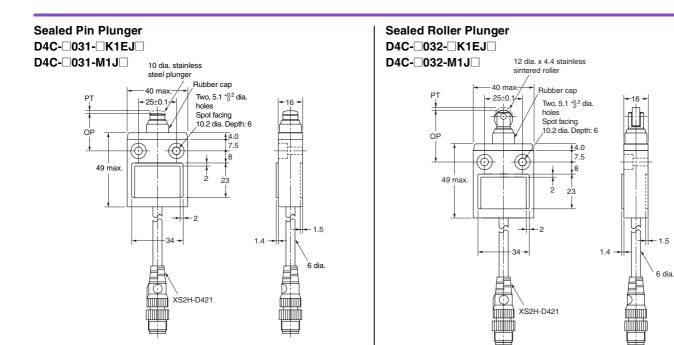


Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Operating characteristics		Model	D4C-□031 -□K1EJ□	D4C-⊡032 -□K1EJ□
Operating force	OF	max.	17.65 N	17.65 N
Release force	RF	min.	4.41 N	4.41 N
Pretravel	PT	max.	1.8 mm	1.8 mm
Overtravel	OT	min.	3 mm	3 mm
Movement Differential	MD	max.	0.2 mm	0.2 mm
Operating Position	OP		24.9±1 mm	34.3±1 mm

Note: Specifications are the same for -M1J Switches



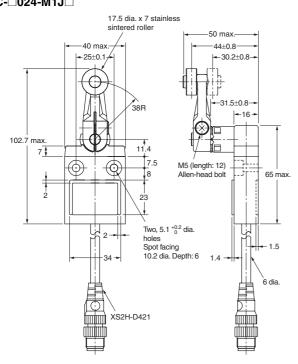


Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Operating	Model		D4C024K1EJ
characteristics		mouol	
Operating force	OF	max.	5.69 N
Release force	RF	min.	1.47 N
Pretravel	PΤ		10°±3°
Overtravel	OT	min.	50°
Movement Differential	MD	max.	3°
Operating Position	OP		

Note: Specifications are the same for -M1J Switches

Weather-resistant Models

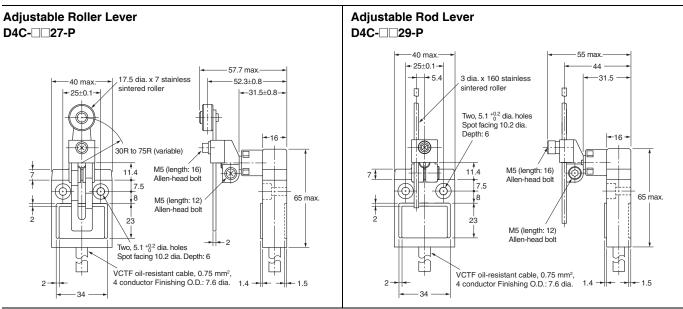

Note: Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Operating characteristics		Model	D4C-027-P	D4C-029-P *
Operating force		max.	5.69 N	5.69 N
Release force	RF	min.	1.47 N	1.47 N
Pretravel	PΤ	max.	25°	25°
Overtravel	OT	min.	40°	40°
Movement Differential	MD	max.	3°	3°

* Operation characteristics for the D4C-027-P and D4C-029-P are for a lever length of 38 mm.

Safety Precautions

Refer to Safety Precautions for All Limit Switches.

Precautions for Correct Use

Operating Environment

- Seal material may deteriorate if a Switch is used outdoor or where subject to special cutting oils, solvents, or chemicals. Always appraise performance under actual application conditions and set suitable maintenance and replacement periods.
- Install Switches where they will not be directly subject to cutting chips, dust, or dirt. The Actuator and Switch must also be protected from the accumulation of cutting chips or sludge.




- Constantly subjecting a Switch to vibration or shock can result in wear, which can lead to contact interference with contacts, operation failure, reduced durability, and other problems.
 Excessive vibration or shock can lead to false contact operation or damage. Install Switches in locations not subject to shock and vibration and in orientations that will not produce resonance.
- The Switches have physical contacts. Using them in environments containing silicon gas will result in the formation of silicon oxide (SiO₂) due to arc energy. If silicon oxide accumulates on the contacts, contact interference can occur. If silicon oil, silicon filling agents, silicon cables, or other silicon products are present near the Switch, suppress arcing with contact protective circuits (surge killers) or remove the source of silicon gas.

Handling

The bottom of the Switch at the cable outlet is resin-molded. Secure the cable at a point 5 cm from the Switch bottom to prevent exertion of excess force on the cable.

When bending the cable, provide a bending radius of 45 mm min. so as not to damage the cable insulation or sheath. Excessive bending may cause fire or leakage current.




Connections


- Be sure to connect a fuse with a breaking current 1.5 to 2 times larger than the rated current to the Limit Switch in series in order to protect the Limit Switch from damage due to short-circuiting.
- When using the Limit Switch for the EN ratings, use the gl or gG 10-A fuse.

Operation

- Operation method, shapes of cam and dog, operating frequency, and overtravel have a significant effect on the service life and precision of a Limit Switch. For this reason, the dog angle must be 30° max., the surface roughness of the dog must be 6.3 S min. and hardness must be Hv 400 to 500.
- To allow the plunger-type actuator to travel properly, adjust the dog and cam to the proper setting positions. The proper position is where the plunger groove fits the bushing top.



• To allow the roller lever-type actuator to travel properly, adjust the dog and cam so that the arrow head is positioned between the two convex markers as shown below.




Indicator


 Indicator-equipped switch has contacts and indicator in parallel. When contacts are open, leakage current flows through the indicator circuit and may cause load's malfunction.
 Please check the load's OFF current before use the indicatorequipped switch.

Mounting

 A maximum of 6 Switches may be group-mounted. In this case, pay attention to the mounting direction so that the convex part of the group-mounting guide on one Switch fits into the concave part of the guide on the other Switch as shown in the figure below. For group mounting, the mounting panel must have a thickness (t) of 6 mm min.




 If the mounting panel is warped or has protruding parts, a malfunction may result. Make sure that the mounting panel is not warped and has even surfaces.
 Mounting Holes



- Use a Switch with a rubber cap when using the plunger type in an environment where malfunction is possible due to environmental conditions such as dust or cutting chips which may not allow resetting.
- Do not expose the Switch to water exceeding 70°C or use it in steam.
- When the D4C is used in a circuit of a device to be exported to Europe, classified as Overvoltage Class III as specified in IEC664, provide a contact protection circuit.
- Tighten each screw to a torque according to the following table.


No.	Туре	Appropriate tightening torque*
1	M5 Allen-head bolt	4.90 to 5.88 N⋅m
2	M3.5 head mounting screw	0.78 to 0.88 N⋅m
3	M5 Allen-head bolt	4.90 to 5.88 N⋅m

* By removing the two screws from the head, the head direction can be rotated 180°. After changing the head direction, re-tighten to the torque specified above. Be careful not to allow any foreign substance to enter the Switch.



Micro-load Models (D4C-4, -5, -6)

Micro-load models can be used for switching in the range shown below.



Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE

PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warrantv.

See http://www.omron.com/global/ or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions. Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation Industrial Automation Company

http://www.ia.omron.com/