

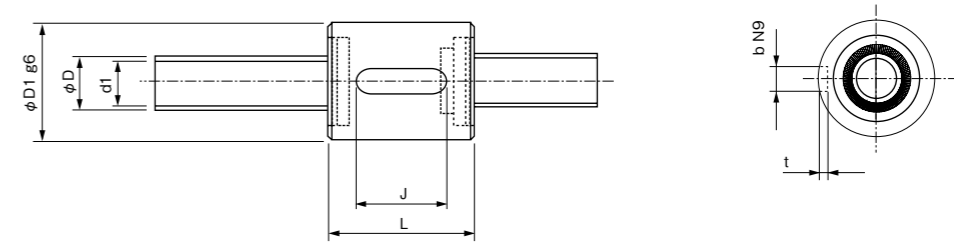


Compact Rolled Ball Screws RBSS Series

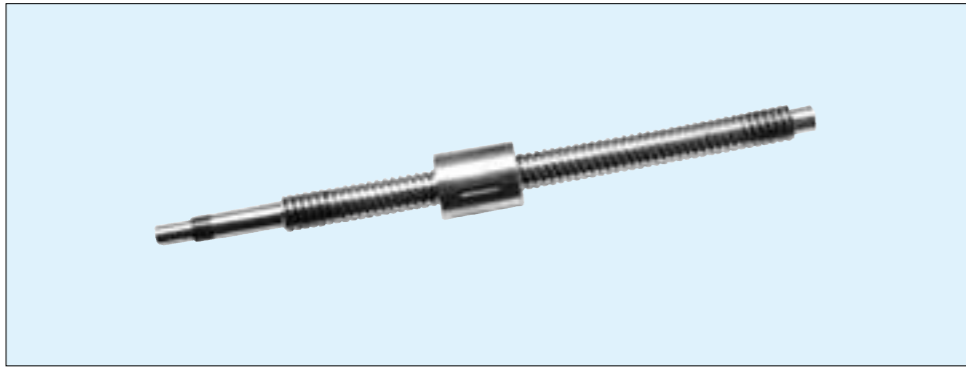

Identification Number	Shaft		Lead l	Circuit Direction	Ball Diameter	Number of Circuits	Axial Play
	Diameter D	Root Diameter d_1					
RBSS1404-3.6	14	11.5	4	Right	2.778	3.6	0.10
RBSS1405-2.6	14	11.2	5	Right	3.175	2.6	0.10
RBSS1605-2.6	16	13.4	5	Right	3.175	2.6	0.10
RBSS1808-3.6	18	14.4	8	Right	4.763	3.6	0.10
RBSS2005-2.6	20	17.2	5	Right	3.175	2.6	0.10
RBSS2010-2.6	20	16.6	10	Right	4.763	2.6	0.15
RBSS2505-2.6	25	22.2	5	Right	3.175	2.6	0.10
RBSS2510-5.3	25	20.2	10	Right	6.350	5.3	0.20
RBSS2806-2.6	28	25.7	6	Right	3.175	2.6	0.10
RBSS2806-5.3	28	25.7	6	Right	3.175	5.3	0.10
RBSS3210-2.6	32	27.1	10	Right	6.350	2.6	0.20
RBSS3210-5.3	32	27.1	10	Right	6.350	5.3	0.20
RBSS3610-2.6	36	30.5	10	Right	6.350	2.6	0.17
RBSS3610-5.3	36	30.5	10	Right	6.350	5.3	0.17

Nut Dimensions					Basic Load Rating (N)		Standard Shaft Length
D_1	L	J	b	t	Dynamic C	Static C_0	
31	35	20	4	2.5	5480	11460	500 1000
32	36	20	4	2.5	4990	11270	
34	36	20	5	3	5390	13230	1000 1500
50	56	32	6	3.5	13030	30960	
40	36	20	5	3	5970	16170	1000 1500 2000
52	58	32	6	3.5	10580	24990	
43	36	20	5	3	6660	20580	1000 1500 2000
60	94	50	8	4	31160	8330	
50	42	20	6	3.5	6950	23030	1000 1500 2000
50	60	32	6	3.5	12740	46550	
67	64	32	8	4	19690	53410	1000 1500 2000
67	94	50	8	4	35960	107310	
70	64	32	8	4	20770	59780	1000 1500 2000
70	94	50	8	4	37730	118580	

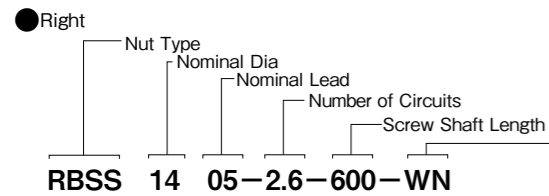

Blank	Standard Type
WN	Without Wiper Seal